

Safety Information

Applicable Printer models
9050/9050R
7050/7050R/7010/7010R
3050/3050R/3010/3010R
1C+





CAUTION

To ensure safety precautions, be sure to read this guide before using the product.
After reading this guide, keep it in handy for future reference.

Index

- Safety Precautions 4**
 - Warning Symbols
 - Installation Location
 - Power Connection
 - Handling
 - Ink Cartridge
- Before Use 6**
 - Installation Location
 - Power Connection
 - Connecting to a Computer
 - Required Spacing
 - Handling
 - Originals
 - Printable Area
 - Printing Paper
 - Printouts
 - Materials Not to Be Printed
 - Ink Cartridge Storage and Handling Precautions
 - Disposing of Used Ink Cartridges and Cleaning Tanks
- Specifications 15**

ComColor Series

Model:SE-H301/SE-M301/SE-L301/SE-M401/SE-L401/SE-LL301

This Product Contains RFID (Radio Frequency Identification) System

Model: 050-34901

Contains FCC ID: RPARFR6

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The user is cautioned that unauthorised changes or modifications not approved could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

Contains IC: 4819A-RFR6

Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

<p>Perchlorate Material-special handling may apply, See www.dtsc.ca.gov/hazardouswaste/perchlorate This product may contain certain substances which are restricted when disposed. Therefore, be sure to consult your contracted service dealer.</p>
--

WARNING

The back light tube positioned in the LCD of the Control Panel on this Model contains mercury which must be recycled or disposed of as hazardous waste.

Copyright © 2014 RISO KAGAKU CORPORATION

Safety Precautions

This section describes the items that should be followed for safe use of this machine. Be sure to read this section before using the machine.

Warning Symbols

To use the machine properly and to prevent human injury and damage to properties, the following warning symbols are used. Read the meaning of the symbols to understand and then read this guide.

WARNING


Indicates that incorrect handling by ignoring this symbol may cause death or serious human injury.

CAUTION


Indicates that incorrect handling by ignoring this symbol may cause human injury or damage to properties.

Examples of symbols



The  symbol indicates a prohibited action. A specific prohibited action is drawn inside or next to the symbol. (The left figure indicates that disassembly is prohibited.)



The  symbol indicates a forced action or an instruction. A specific instruction is drawn inside the symbol. (The left figure indicates an instruction to remove the power plug from the electrical outlet.)

Installation Location

CAUTION

- Place the machine on a flat or stable surface. Otherwise, the machine might be inclined or fall down, resulting in human injury.
- When installing the machine without the use of a special scanner stand, do not install the machine in a location where it will be exposed to vibration from other machines. Otherwise, the machine may drop or fall and injure someone.
- The machine has ventilation openings. Place the machine at least 100 mm (3 15/16") from walls. If the ventilation openings are blocked, the inside of the machine may become hot and a fire might occur.
- Do not place the machine in a dusty or humid location. Otherwise, a fire or an electric shock might occur.

Power Connection

WARNING

- Install the machine near the wall socket to avoid using an extension cord between the machine and the wall socket. If an extension cord is absolutely required, do not use longer than 5m (15ft). Otherwise, a fire or an electric shock might occur.
- Do not damage or rebuild the power cord. Placing a heavy object on the cord or pulling or forcibly bending the cord may damage the cord, resulting in a fire or an electric shock.
- The power cord supplied with this product can be used only for this machine. Do not use it for another electric product. Otherwise, a fire or an electric shock might occur.
- Do not connect a power cord other than the scanner (HS4000) cord to the scanner socket on the machine.
- Do not plug or unplug the power cord if your hands are wet. Otherwise, an electric shock might occur.



CAUTION

- Connect the plug securely to the electrical outlet to avoid a loose connection.
- Do not pull the power cord when unplugging it. Otherwise, it could become damaged and a fire or an electric shock might occur. Be sure to hold on to the plug when unplugging the power cord.
- If the machine will not be used for a long time, such as during a holiday, unplug the power cord from the electrical outlet for safety.
- Pull out the power plug from the electrical outlet at least once a year and clean the prongs of the plug and their surroundings. Dust collected on these areas can result in fire.

Handling

WARNING

- Do not place water containers or metallic objects on the machine. If water drips inside the machine or a metallic object drops inside it, a fire or an electric shock might occur.
- Do not insert or drop any metallic material or flammable substances into the machine through any opening. A fire or an electric shock might occur.
- Do not remove the covers. Otherwise, you might be electrically shocked by the high-voltage part inside.
- Do not disassemble or rebuild the machine by yourself. Otherwise, a fire or an electric shock might occur.
- If the unit emits excessive heat, smoke or foul odour, immediately turn off the main power switch, unplug the power cord and contact your service representative. Otherwise, a fire or an electric shock might occur.
- If something drops inside the unit, immediately turn off the main power switch, unplug the power cord and contact your service representative. Continued use might result in a fire or an electric shock.
- When using the IC card reader
The IC card reader continually emits a weak signal. If you are using a cardiac pacemaker and notice any abnormalities, immediately move away from the machine. Consult a physician immediately.



CAUTION

- Do not insert your fingers in the areas around the standard tray or stacking tray. Otherwise, an injury may occur.
- The inside of the printer may have areas with ink. Be careful not to let the ink come in contact with your hands or clothing.
Should ink accidentally make contact with your hands, wash it off with detergent as soon as possible.
- When moving the machine, contact your service representative.
If you try to forcibly move the machine, the machine may overturn, resulting in injury.

Ink Cartridge

CAUTION

- Avoid contact to eyes and/or skin. If ink gets into your eyes, flush it out immediately with plenty of water. If ink comes in contact with your skin, wash it off thoroughly using soap.
- Allow plenty of ventilation during printing. Seek fresh air immediately if you feel unwell during use.
- If you feel sick, seek medical advice immediately.
- Use the ink only for printing purposes.
- Do not dispose of used ink cartridges by burning. The ink is combustible and can cause the fire to grow, resulting in burns.
- Store ink cartridges out of the reach of children.
- The ink is a combustible liquid. In the event of fire, use potassium carbonate mist, foam, powder, or a carbon dioxide fire extinguisher.

Before Use

This section describes the precautions that must be observed before using the machine.

Installation Location

Observe the following precautions.

- **Your dealer will help you to determine a proper location for the machine at the time of delivery.**
- **When moving the machine, contact your service representative.**
- **Avoid installing the machine in the following locations. Otherwise, incorrect operation, malfunction, or accident might occur.**
 - Places subject to direct sunlight or excessively illuminated such as next to windows (if inevitable, use a curtain at the window)
 - Places subject to sudden temperature variations
 - Places excessively hot and humid or cold and dry
 - Places close to fire or heat
 - Places directly subject to cold air from air conditioners or hot air from heaters, as well as radiant heat
 - Places with poor air permeability or ventilation
 - Dusty places
 - Places subject to excessive vibration
- **Install the machine in a place whose levelness is within the following specified range.**
Installation surface level: 2° or less
- **Operate the machine under the following environment conditions.**
Temperature range: 15°C to 30°C (59°F to 86°F)
Humidity range: 40% to 70% RH (non-condensing)


Power Connection

Observe the following precautions.


- **Connect the plug securely to the optional connection outlet on the printer main unit to avoid a loose connection.**
- **Install the machine near an electrical outlet.**
- **When the scanner is connected to the optional connection outlet on the printer main unit, the scanner is turned ON and OFF by the power of the main unit.**

Connecting to a Computer

■ Connecting to Multiple Computers

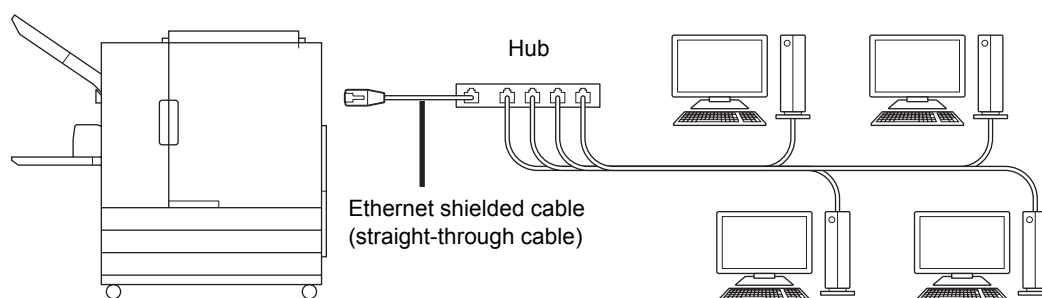

■ Connecting to One Computer

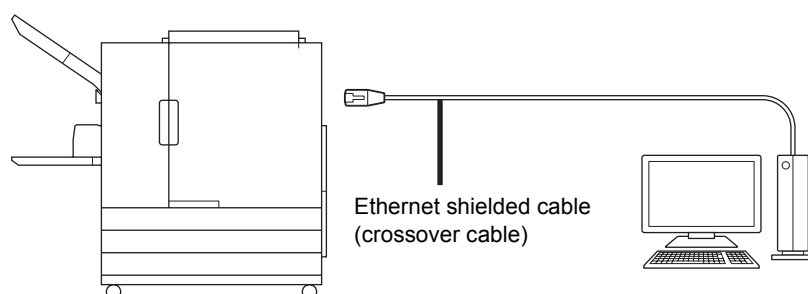

The maximum allowable voltage for all input/output connection is 5V.




- Use a commercially available ethernet shielded cable.
It is recommended that you use one of the following types of ethernet shielded cables according to your network environment.
 - Cat 5 (Cat 5e) cable for 100BASE network
 - Cat 6 cable for 1000BASE network
- To print from a computer, you must install the printer driver. For the installation method, see **"Installing the Printer Driver"** in the **"Basic Guide"**.

Required Spacing


■ Main Unit

Provide sufficient space for the front cover to open.

● As seen from the front

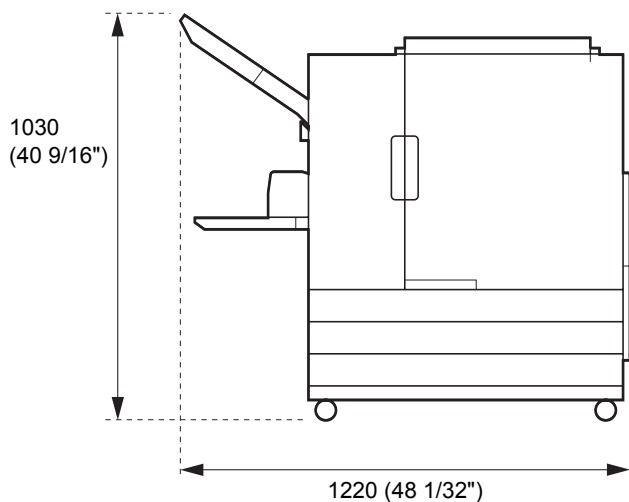

● As seen from the side

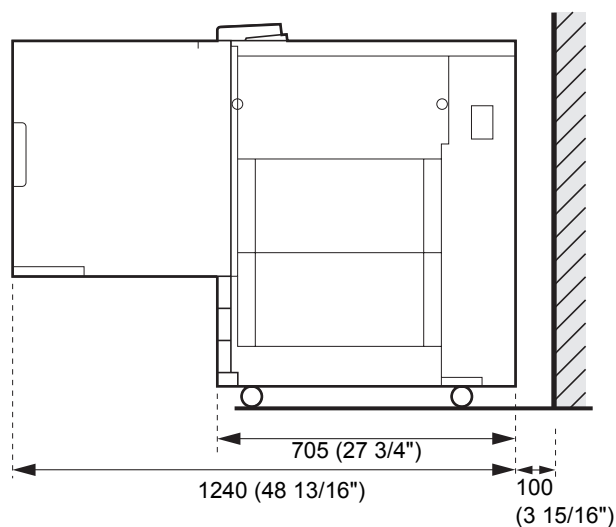


Units: mm (inch)

■ Main Unit with Optional Equipment Installed


Provide sufficient space for opening the front covers and original cover of the scanner.

● As seen from the front

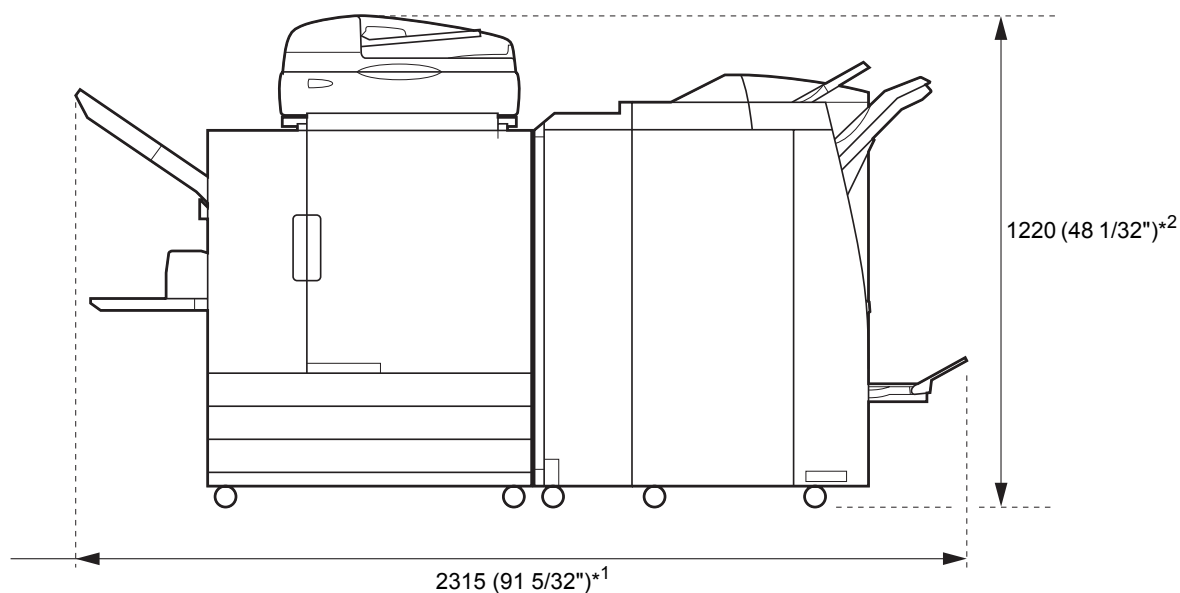

Units: mm (inch)

- As seen from the side

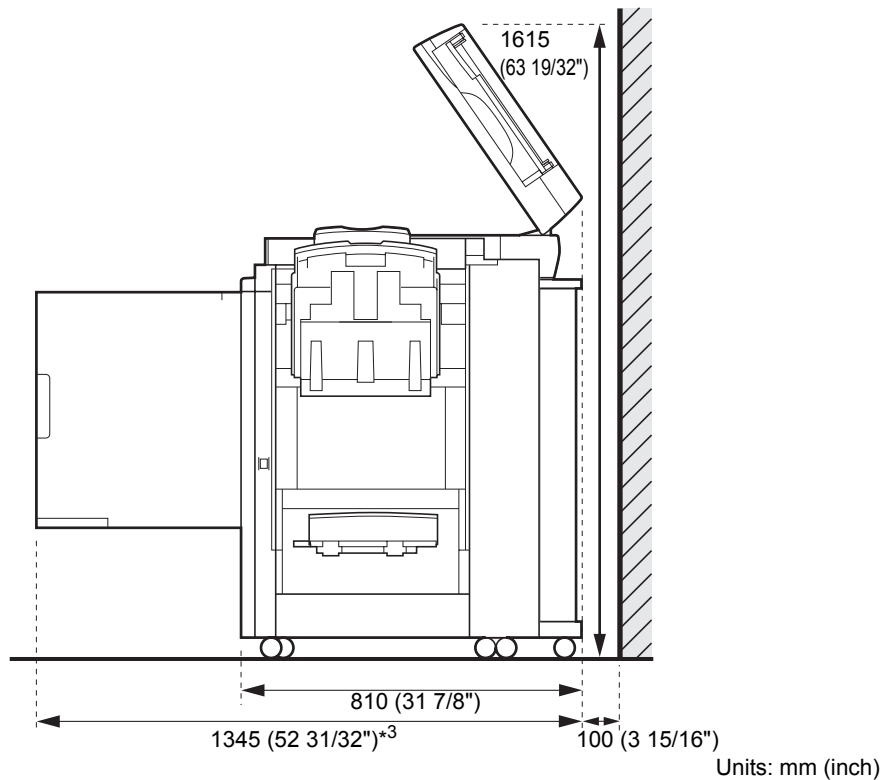

The size varies depending on the optional equipment used.

*1 Width	Main unit only	1,220 mm (48 1/32")
	Main unit and Scanner (when using special scanner stand)	1,225 mm (48 7/32")
	Main unit and Face Down Offset Tray	1,205 mm (47 7/16")
	Main unit and Wide Stacking Tray	1,845 mm (72 21/32")
	Main unit and Auto-control Stacking Tray	1,705 mm (67 1/8")
	Main unit, Face Down Offset Tray, and Wide Stacking Tray	1,840 mm (72 7/16")
	Main unit, Face Down Offset Tray, and Auto-control Stacking Tray	1,695 mm (66 23/32")
	Main unit and Multifunction Finisher	2,315 mm (91 5/32")

*2 Height	Main unit only	1,030 mm (40 9/16")
	Main unit and Scanner (when using special scanner stand)	1,220 mm (48 1/32")
	Main unit and Multifunction Finisher	1,130 mm (44 1/2")
	Main unit and Face Down Offset Tray	1,110 mm (43 11/16")

*3 Depth	Main unit only	1,240 mm (48 13/16")
	Main unit and Scanner (when using special scanner stand)	1,345 mm (52 31/32")
	Main unit and Multifunction Finisher	1,280 mm (50 13/32")

The ComColor 9050 is used in the illustration of this machine.

A multifunction finisher cannot be connected to the ComColor 7010, 7010R, 3010, 3010R or 1C+.

Handling

- Do not use the main power switch to turn the machine OFF or unplug the machine during operation.
- Do not open any of the covers during operation.
- Do not move the machine.
- The machine contains precision components and moving parts. Therefore, do not perform operations not described in the guides.
- Do not place heavy objects on the machine or subject the machine to strong shocks.
- Open and close the covers gently.
- After turning the main power switch OFF, wait until the main power lamp goes off before turning the main power switch ON.
- Perform head-cleaning if the machine will not be used for a long time or before using the machine after a long period of non-use.
Ink may deteriorate or dry up in the ink feed path inside the machine, resulting in clogging of the print head.
It is recommended that head-cleaning be performed regularly to prevent this from occurring.
- Do not touch the print head, as this can result in malfunction or deterioration in print quality.
- Always keep all the color ink cartridges in the machine. Do not leave the machine with the ink cartridges removed, even when not using the machine.

Originals

If you connect the optional scanner, you can copy or scan an original by placing it on the platen glass or in the ADF to be read.

If you use an original that is not compatible with this machine, it may result in problems such as paper jamming, soiling or malfunctions.

Specifications of Original Source

	Platen Glass	ADF
Original Size	Maximum 303 mm × 432 mm (11 15/16" × 17")	100 mm × 148 mm - 297 mm × 432 mm (3 15/16" × 5 13/16" - 11 11/16" × 17")
Original Weight	_*1	52 g/m ² (14-lb bond) to 128 g/m ² (34-lb bond)
Original Type	-	Plain paper
Max. Capacity	-	100 sheets*2

*1 Platen glass durability: 200 N (over an A3-size area)

*2 When the size is A4/Letter and the weight is 80 g/m² (21-lb bond) or less
60 sheets (80 g/m² (21-lb bond)) or less for a paper size exceeding B4

■ Precautions about Originals

Originals that have ink or correcting fluid must be dried before being placed on the platen glass.

The following types of originals cannot be scanned using the ADF, even when within the above specification range.
Use the platen glass instead.

- Paper that has been cut and pasted
- Heavily wrinkled or curled paper
- Folded paper
- Glued paper
- Paper with holes
- Torn paper or paper with irregular edges
- Transparencies, tracing paper, and other highly transparent materials
- Art paper or coated paper with a processed surface on the front or back
- Thermal paper for fax machines or word processors
- Paper with an uneven surface

Printable Area

The size of the printable area varies depending on whether you are printing a job from a computer or copying a paper original.

■ Maximum Print Area

Model	Maximum Print Area		Print Area (Margin)	
	Printing	Copying	Standard	Maximum
ComColor 9050/9050R/7050/7050R	314 mm × 548 mm (12 3/8" × 21 9/16")	295 mm × 430 mm ^{*1} (11 5/8" × 16 15/16")	3 mm (1/8")	1 mm (0.04")
ComColor 7010/7010R/1C+	310 mm × 544 mm (12 3/16" × 21 7/16")	295 mm × 430 mm ^{*1} (11 5/8" × 16 15/16")	5 mm (3/16")	3 mm (1/8")
ComColor 3050/3050R/3010/3010R	210 mm × 544 mm (8 1/4" × 21 7/16")	210 mm × 430 mm ^{*2} (8 1/4" × 16 15/16")		

*1 When using the platen glass: 303 mm × 432 mm (11 15/16" × 17")

*2 When using the platen glass: 210 mm × 432 mm (8 1/4" × 17")




Printing without margins cannot be performed. Margins are always added around the edges of the paper.

■ Printable Area (Margin)

Some areas around the edges of the paper cannot be printed regardless of the data size of the original. The size of the blank margin left by the edges of the paper (where printing is not possible) varies depending on the model.

See "Maximum Print Area".

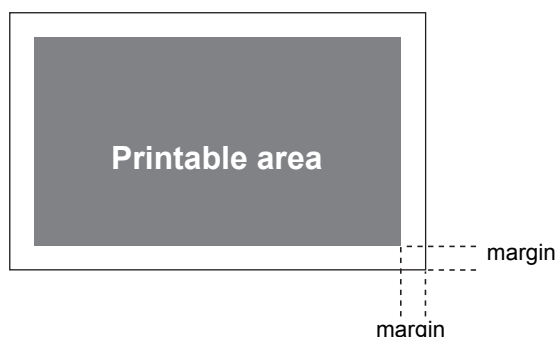


- When [Printable area] is set to [Maximum] in [Admin. Settings], the printable area can be changed to 1 mm (0.04") from the edge of the paper. Depending on the content of the original, text or images may be lost or bleeding may occur.
- Even when the paper size is within the maximum print area, a margin is always provided.
- When copying, the machine cannot scan the 1 mm (0.04") margin of the original.

■ Printable Area of Envelopes

- C4: 229 mm × 324 mm (9" × 12 3/4")
- C5: 162 mm × 229 mm (6 3/8" × 9")
- C6: 114 mm × 162 mm (4 1/2" × 6 3/8")
- DL-R: 110 mm × 220 mm (4 5/16" × 8 11/16")
- Envelope 229 mm × 305 mm (9" × 12")
- Envelope 254 mm × 331 mm (10" × 13")
- NO.10 envelope 105 mm × 242 mm (4.125" × 9.5")

The printable area on envelopes is the area enclosed within 10 mm (3/8") of the edges of the envelope.

Any part of the image that does not fit within the printable area is not printed.

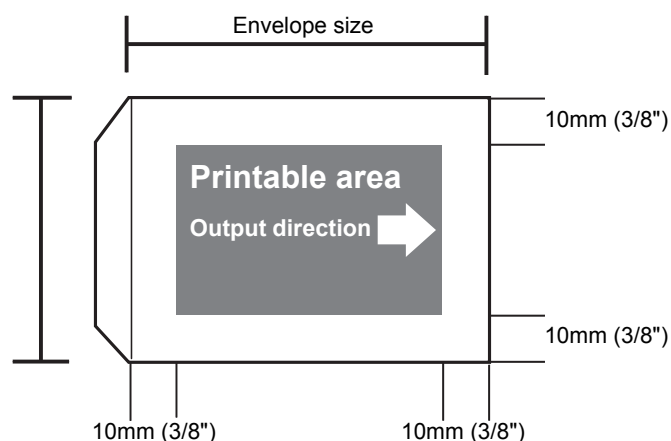

- When printing on envelopes, it is recommended you install an optional stacking tray.
- To also print on the flap section, you must register the envelope size including the flap section. For more information, contact the dealer (or the maintenance or service company).
- You cannot use duplex print when printing on envelopes.

Printing Paper

■ If you use paper that is not compatible with this machine, it may result in problems such as paper jamming, soiling or malfunctions.

■ The specifications for the paper that can be loaded in the feed tray and standard tray differ.

Paper Basic Specifications

	Feed tray	Standard Tray
Size	182 mm × 182 mm - 297 mm × 420 mm (7 3/16" × 7 3/16" - 11 11/16" × 17")	90 mm × 148 mm - 340 mm × 550 mm (3 9/16" × 5 13/16" - 13 3/8" × 21 5/8")
Weight	52 g/m ² (14-lb bond) to 104 g/m ² (28-lb bond) (45 kg - 90 kg (99 lb - 198 lb) Ream weight: duodecimo)	46 g/m ² (12-lb bond) to 210 g/m ² (56-lb bond) (40 kg - 180 kg (88 lb - 397 lb) Ream weight: duodecimo)
Paper Type	Plain paper, recycled paper	Plain paper, recycled paper, envelopes, postcards (plain paper), postcards (inkjet)
Maximum Load	500 sheets in each tray* (or hight up to 50 mm (1 15/16"))	1000 sheets* (or hight up to 110 mm (4 5/16"))

* When the weight is 85 g/m² (23-lb bond)

■ **Acceptable paper sizes depend on the output tray.**

Face Down Tray: 90 mm × 148 mm - 340 mm × 550 mm (3 9/16" × 5 13/16" - 13 3/8" × 21 5/8")
(Envelopes are not acceptable.)

Face Down Offset Tray: When printouts are not collated: 90 mm × 148 mm - 340 mm × 550 mm
(3 9/16" × 5 13/16" - 13 3/8" × 21 5/8") (Envelopes are not acceptable.)
When offset output is applied: Paper width 131 mm - 305 mm (5 3/16" - 12")
(Envelopes are not acceptable.)

RISO Auto-control Stacking Tray: 100 mm × 148 mm - 320 mm × 432 mm (3 15/16" × 5 13/16" - 12 5/8" × 17")
(When using paper exceeding 432 mm (17") , close the paper guides.)

Wide Stacking Tray: 90 mm × 148 mm - 340 mm × 550 mm (3 9/16" × 5 13/16" - 13 3/8" × 21 5/8")

For information on each tray in the multifunction finisher, see "Multifunction Finisher (Optional)" in "Specifications".



- The feed tray is not available for ComColor 7010/7010R/3010/3010R/1C+.
- Depending on the type of paper, operating environment, and storage conditions, even paper meeting these size and weight specifications may not be able to pass through the machine in some cases.

■ **Do not use the following paper types as they will cause problems such as paper jamming or malfunctions.**

- Paper that does not comply with the conditions in the basic specifications
- Paper with a processed surface, such as thermal paper or carbon paper
- Curled paper (3 mm (1/8") or more)
- Paper with wrinkles
- Bent paper
- Torn paper
- Paper with ripples
- Coated paper such as art paper
- Paper with jagged edges
- Glued paper
- Paper with holes
- Glossy paper for photographs
- Transparencies
- Yupo paper

■ **Always use paper from a sealed package.**

■ **After finishing the print job, return the unused paper from the standard tray to the package and store. If you leave the paper in the standard tray, the paper may curl and cause paper jamming.**

■ **If the paper is not cut cleanly or has a textured surface (such as drawing paper), fan the paper before use.**

■ **Store paper flat, away from high temperatures, high humidity, and direct sunlight.**

Printouts

■ **When using duplex printing, the edges of the paper may become dirty depending on the original.**

■ **Printouts lose their color (discolor) over time due to various chemicals in the air and light.**
You can protect printouts against discoloration by allowing the printout to fully dry and then inserting it into a glass frame or laminating it.

■ **When storing printouts in a clear file folder, be sure to use only those made of polyethylene terephthalate (PET).**

■ **Printouts can lose color when they come in contact with water or sweat. Avoid storing printouts in a place subject to moisture.**
Writing on printouts with an oil-based pen can cause bleeding.

■ **The print density of the printout immediately after printing differs from the print density 24 hours later. Print density decreases over time.**

■ **Do not place printouts from this machine on top of printouts from a laser printer or copier that uses toner. The paper might stick to the printed toner and the toner might transfer to the printout.**

Materials Not to Be Printed

- **Do not use the machine in any manner which violates the law or infringes on established copyrights, even when making copies for personal use. Consult your service representatives for further details. In general, use discretion and common sense.**

Ink Cartridge Storage and Handling Precautions

Ink cartridges for this machine are made of paper. For this reason, cartridges may become deformed and unusable if stored incorrectly or in an unsuitable environment. Store the ink cartridges properly, according to "Storage".

■ Storage

- Be sure to store the ink cartridge horizontally in the direction indicated by the this-side-up mark.
- Avoid freezing or placement under direct sunlight. Store in areas between 5°C and 35°C (41°F - 95°F). Do not store in locations subject to extreme changes in temperature.
- If the plastic bag is opened but the ink cartridge is not to be used right away, store the ink cartridge properly and insert it into the machine as soon as possible.

■ Handling Precautions

- Do not shake the ink cartridge. This can create bubbles, resulting in a deterioration in print quality.
- Do not add ink into the ink cartridge.
- Remove the ink cartridge from its plastic bag just before inserting it into the machine.
- Adequate operation temperature is 15°C - 30°C (59°F - 86°F).
Using the ink cartridge outside the adequate operation temperature range can result in a deterioration in print quality (reduced ink discharge).
The spraying properties of the inkjet printer can vary depending on the ink viscosity. In particular, at lower temperatures, the ink viscosity increases and can result in clogging of the print head. Follow the information on the operation environment and storage temperature, check the manufacturing date, and use soon after purchase.
- If the cover of the ink cartridge is removed and the ink cartridge is left for a long period of time without being used up, various chemicals in the air can cause the ink cartridge to deteriorate.
Using ink that has deteriorated or changed in quality can damage the print head or ink flow path.
- Do not dump the ink left in the cartridge into the sewers.
- The ink is a combustible liquid.
In the event of fire, use potassium carbonate mist, foam, powder, or a carbon dioxide fire extinguisher.

Disposing of Used Ink Cartridges and Cleaning Tanks

- **The ink in the cleaning tank cannot be used for printing.**

Specifications

■ ComColor 9050/9050R Specifications

Basic Functions and Print Functions

Model		SE-H301	
Type		Console	
Color Support		Full color	
Print Type		Line-type inkjet system	
Ink Type		Oil-based pigment ink (Cyan, Magenta, Yellow, Black)	
Resolution		Standard: 300 dpi (main scanning direction) × 300 dpi (sub-scanning direction)	
		Fine: 300 dpi (main scanning direction) × 600 dpi (sub-scanning direction)	
Number of Gray Levels		For each CMYK color (8 gray levels)	
Data Processing Resolution		Standard: 300 dpi × 300 dpi	
		Fine: 300 dpi × 600 dpi	
		Line smoothing: 600 dpi × 600 dpi	
Warm-up Time		2 min. 45 sec. or less (at room temperature of 20°C (68°F))	
First Print Time		Monochrome: 8 sec or less ^{*1} (when copying A4-R/Letter-R orientation using monochrome mode)	
		Color: 8 sec or less ^{*1} (when copying A4-R/Letter-R orientation using color mode)	
Continuous Print Speed ^{*2*7}	A4-R	Simplex: 150 ppm	Duplex: 75 sheets/minute (150 ppm)
	Letter-R	Simplex: 146 ppm	Duplex: 73 sheets/minute (146 ppm)
	A4	Simplex: 110 ppm	Duplex: 55 sheets/minute (110 ppm)
	Letter	Simplex: 116 ppm	Duplex: 58 sheets/minute (116 ppm)
	B4/Legal	Simplex: 90 ppm	Duplex: 42 sheets/minute (84 ppm)
	A3	Simplex: 80 ppm	Duplex: 40 sheets/minute (80 ppm)
	Ledger	Simplex: 78 ppm	Duplex: 39 sheets/minute (78 ppm)
Duplex Printing		Standard	
Paper Size	Standard Tray	Maximum: 340 mm × 550 mm (13 3/8" × 21 5/8") Minimum: 90 mm × 148 mm (3 9/16" × 5 13/16")	
	Feed Tray	Maximum: 297 mm × 420 mm (11 11/16" × 17") Minimum: 182 mm × 182 mm (7 3/16" × 7 3/16")	
Printable Area		Maximum: 314 mm × 548 mm (12 3/8" × 21 9/16")	
Guaranteed Print Area ^{*3}		Standard: Margin width of 3 mm (1/8")	
		Maximum: Margin width of 1 mm (0.04")	
Paper Weight	Standard Tray	46 g/m ² (12-lb bond) to 210 g/m ² (56-lb bond) (plain paper)	
	Feed Tray	52 g/m ² (14-lb bond) to 104 g/m ² (28-lb bond) (plain paper)	
Paper Feed Method/Paper Tray Capacity ^{*4}	Standard Tray	1,000 sheets (Height up to 110 mm (4 5/16"))	
	Feed Tray	500 sheets × 3 trays (Height up to 50 mm (1 15/16"))	
Continuous Printing Capacity		9,999 sheets	
Output Tray Capacity ^{*4}	Standard	500 sheets (Height up to 60 mm (2 3/8"))	
	Option	1,000 sheets (when using the optional auto-control stacking tray or wide stacking tray)	
Page Description Language		Original PDL	
Supported Protocols		TCP/IP, HTTP, HTTPs (SSL), DHCP, ftp, lpr, IPP, SNMP, Port 9100 (RAW port)	

Supported Operating Systems	Microsoft® Windows® 2000	
	Microsoft® Windows® XP (32-bit)	
	Microsoft® Windows Server® 2003 (32-bit/64-bit)	
	Microsoft® Windows Server® 2003 R2 (32-bit/64-bit)	
	Microsoft® Windows® 2000 Server	
	Microsoft® Windows Vista® (32-bit/64-bit)	
	Microsoft® Windows Server® 2008 (32-bit/64-bit)	
	Microsoft® Windows Server® 2008 R2 (64-bit)	
	Microsoft® Windows® 7 (32-bit/64-bit)	
	Microsoft® Windows Server® 2012 (64-bit)	
	Microsoft® Windows Server® 2012 R2 (64-bit)	
	Microsoft® Windows® 8 (32-bit/64-bit)	
	Microsoft® Windows® 8.1 (32-bit/64-bit)	
Installed Fonts		None
Emulation		None
Network Interface		Ethernet 1000BASE-T, 100BASE-TX, 10BASE-T (2ch)
CPU		Intel® Celeron®-M440 (1.86 GHz)
Memory Capacity		1 GB
Hard Disk* ⁶	Capacity	160 GB
	Available Space	140 GB
Operating System		Linux
Power Source		AC 100-240 V, 10-5 A, 50-60 Hz
Power Consumption	Max. 1,000 W	
	Ready* ⁵ : 250 W	
	Sleep: Max. 45 W	
	Stand-by: Max. 1 W	
Operating Noise		Max. 68 dB (when printing)
Operating Environment		Temperature: 15°C to 30°C (59°F to 86°F) Humidity: 40% to 70% RH (non-condensing)
Dimensions (W × D × H)		In use: 1,220 mm × 705 mm × 1,030 mm (48 1/32" × 27 3/4" × 40 9/16")
Weight		168 kg (371 lb)
Safety		IEC60950-1 compliant, Indoor, pollution degree 2*, At altitudes of 2000m or lower * The pollution degree of the usage environment due to dirt and dust in the air. Degree "2" corresponds to a general indoor environment.
Required Space (W × D × H)		With front cover and feed tray extended: 1,220 mm × 1,240 mm × 1,030 mm (48 1/32" × 48 13/16" × 40 9/16") With face down tray and standard tray stored: 1,155 mm × 705 mm × 995 mm (45 15/32" × 27 3/4" × 39 3/16")

*1 Within 10 minutes after the last print job

*2 When using plain paper and recycled paper (85 g/m² (23-lb bond)), and density setting 3 (Standard)
Chart used: Print measurement pattern [Color measurement sample 2 (JEITA standard pattern J6)]

*3 The margin when printing envelopes is 10 mm (3/8").
The guaranteed area when printing images is the area enclosed within 3 mm (1/8") of the edges of the paper.

*4 When using plain paper and recycled paper (85 g/m² (23-lb bond))

*5 When not printing

*6 One gigabyte (GB) is calculated as 1 billion bytes.

*7 The continuous print speed varies depending on the type of optional output equipment connected.
Multifunction finisher: Max. 110 sheets/minute (A4-R Simplex)
Face down offset tray: Max. 120 sheets/minute (A4-R Simplex)

■ ComColor 7050/7050R/3050/3050R Specifications

Basic Functions and Print Functions

Model		ComColor 7050/7050R: SE-M301 ComColor 3050/3050R: SE-M401	
Type		Console	
Color Support		Full color	
Print Type		Line-type inkjet system	
Ink Type		Oil-based pigment ink (Cyan, Magenta, Yellow, Black)	
Resolution		Standard: 300 dpi (main scanning direction) × 300 dpi (sub-scanning direction)	
		Fine: 300 dpi (main scanning direction) × 600 dpi (sub-scanning direction)	
Number of Gray Levels		For each CMYK color (8 gray levels)	
Data Processing Resolution		Standard: 300 dpi × 300 dpi Fine: 300 dpi × 600 dpi Line smoothing: 600 dpi × 600 dpi	
Warm-up Time		2 min. 45 sec. or less (at room temperature of 20°C (68°F))	
First Print Time		Monochrome: 8 sec or less ^{*1} (when copying A4-R/Letter-R orientation using monochrome mode)	
		Color: 8 sec or less ^{*1} (when copying A4-R/Letter-R orientation using color mode)	
Continuous Print Speed ^{*2*7}	A4-R/Letter-R	Simplex: 120 ppm	Duplex: 60 sheets/minute (120 ppm)
	A4/Letter	Simplex: 90 ppm	Duplex: 45 sheets/minute (90 ppm)
	B4/Legal	Simplex: 76 ppm	Duplex: 38 sheets/minute (76 ppm)
	A3/Ledger	Simplex: 66 ppm	Duplex: 33 sheets/minute (66 ppm)
Duplex Printing		Standard	
Paper Size	Standard Tray	Maximum: 340 mm × 550 mm (13 3/8" × 21 5/8") Minimum: 90 mm × 148 mm (3 9/16" × 5 13/16")	
	Feed Tray	Maximum: 297 mm × 420 mm (11 11/16" × 17") Minimum: 182 mm × 182 mm (7 3/16" × 7 3/16")	
Printable Area		ComColor 7050/7050R: Maximum: 314 mm × 548 mm (12 3/8" × 21 9/16") ComColor 3050/3050R: Maximum: 210 mm × 544 mm (8 1/4" × 21 7/16")	
Guaranteed Print Area ^{*3}		ComColor 7050/7050R: Standard: Margin width of 3 mm (1/8") Maximum: Margin width of 1 mm (0.04") ComColor 3050/3050R: Standard: Margin width of 5 mm (3/16") Maximum: Margin width of 3 mm (1/8")	
Paper Weight	Standard Tray	46 g/m ² (12-lb bond) to 210 g/m ² (56-lb bond) (plain paper)	
	Feed Tray	52 g/m ² (14-lb bond) to 104 g/m ² (28-lb bond) (plain paper)	
Paper Feed Method/Paper Tray Capacity ^{*4}	Standard Tray	1,000 sheets (Height up to 110 mm (4 5/16"))	
	Feed Tray	500 sheets × 3 trays (Height up to 50 mm (1 15/16"))	
Continuous Printing Capacity		9,999 sheets	
Output Tray Capacity ^{*4}	Standard	500 sheets (Height up to 60 mm (2 3/8"))	
	Option	1,000 sheets (when using the optional auto-control stacking tray or wide stacking tray)	
Page Description Language		Original PDL	
Supported Protocols		TCP/IP, HTTP, HTTPs (SSL), DHCP, ftp, lpr, IPP, SNMP, Port 9100 (RAW port)	

Supported Operating Systems	Microsoft® Windows® 2000	
	Microsoft® Windows® XP (32-bit)	
	Microsoft® Windows Server® 2003 (32-bit/64-bit)	
	Microsoft® Windows Server® 2003 R2 (32-bit/64-bit)	
	Microsoft® Windows® 2000 Server	
	Microsoft® Windows Vista® (32-bit/64-bit)	
	Microsoft® Windows Server® 2008 (32-bit/64-bit)	
	Microsoft® Windows Server® 2008 R2 (64-bit)	
	Microsoft® Windows® 7 (32-bit/64-bit)	
	Microsoft® Windows Server® 2012 (64-bit)	
	Microsoft® Windows Server® 2012 R2 (64-bit)	
	Microsoft® Windows® 8 (32-bit/64-bit)	
	Microsoft® Windows® 8.1 (32-bit/64-bit)	
Installed Fonts		None
Emulation		None
Network Interface		Ethernet 1000BASE-T, 100BASE-TX, 10BASE-T (2ch)
CPU		Intel® Celeron®-M440 (1.86 GHz)
Memory Capacity		512 MB
Hard Disk* ⁶	Capacity	160 GB
	Available Space	140 GB
Operating System		Linux
Power Source		AC 100-240 V, 10-5 A, 50-60 Hz
Power Consumption	Max. 1,000 W	
	Ready* ⁵ : 250 W	
	Sleep: Max. 45 W	
	Stand-by: Max. 1 W	
Operating Noise		Max. 68 dB (when printing)
Operating Environment		Temperature: 15°C to 30°C (59°F to 86°F) Humidity: 40% to 70% RH (non-condensing)
Dimensions (W × D × H)		In use: 1,220 mm × 705 mm × 1,030 mm (48 1/32" × 27 3/4" × 40 9/16")
Weight		168 kg (371 lb)
Safety		IEC60950-1 compliant, Indoor, pollution degree 2*, At altitudes of 2000m or lower * The pollution degree of the usage environment due to dirt and dust in the air. Degree "2" corresponds to a general indoor environment.
Required Space (W × D × H)		With front cover and feed tray extended: 1,220 mm × 1,240 mm × 1,030 mm (48 1/32" × 48 13/16" × 40 9/16") With face down tray and standard tray stored: 1,155 mm × 705 mm × 995 mm (45 15/32" × 27 3/4" × 39 3/16")

*1 Within 10 minutes after the last print job

*2 When using plain paper and recycled paper (85 g/m² (23-lb bond)), and density setting 3 (Standard)
Chart used: Print measurement pattern [Color measurement sample 2 (JEITA standard pattern J6)]

*3 The margin when printing envelopes is 10 mm (3/8").
For ComColor 7050/7050R, the guaranteed area when printing images is the area enclosed within 3 mm (1/8") of the edges of the paper.
For ComColor 3050/3050R, the guaranteed area when printing images is the area enclosed within 5 mm (3/16") of the edges of the paper.

*4 When using plain paper and recycled paper (85 g/m² (23-lb bond))

*5 When not printing

*6 One gigabyte (GB) is calculated as 1 billion bytes.

*7 The continuous print speed varies depending on the type of optional output equipment connected.

Multifunction finisher: Max. 110 sheets/minute (A4-R Simplex)

Face down offset tray: Max. 110 sheets/minute (A4-R Simplex)

■ ComColor 7010/7010R/3010/3010R/1C+ Specifications

Basic Functions and Print Functions

Model		ComColor 7010/7010R: SE-L301 ComColor 3010/3010R: SE-L401 ComColor 1C+: SE-LL301	
Type		Console	
Color Support		ComColor 7010/7010R/3010/3010R: Full color ComColor 1C+: Dual-Color (Magenta, Black)	
Print Type		Line-type inkjet system	
Ink Type		ComColor 7010/7010R/3010/3010R: Oil-based pigment ink (Cyan, Magenta, Yellow, Black) ComColor 1C+: Oil-based pigment ink (Magenta, Black)	
Resolution		Standard: 300 dpi (main scanning direction) × 300 dpi (sub-scanning direction)	
		Fine: 300 dpi (main scanning direction) × 600 dpi (sub-scanning direction)	
Number of Gray Levels		For each CMYK color (8 gray levels)	
Data Processing Resolution		Standard: 300 dpi × 300 dpi Fine: 300 dpi × 600 dpi Line smoothing: 600 dpi × 600 dpi	
Warm-up Time		2 min. 45 sec. or less (at room temperature of 20°C (68°F))	
First Print Time		Monochrome: 8 sec or less* ¹ (when copying A4-R/Letter-R orientation using monochrome mode)	
		Color: 8 sec or less* ¹ (when copying A4-R/Letter-R orientation using color mode)	
Continuous Print Speed* ^{2,7}	A4-R/Letter-R	Simplex: 120 ppm	Duplex: 60 sheets/minute (120 ppm)
	A4/Letter	Simplex: 90 ppm	Duplex: 45 sheets/minute (90 ppm)
	B4/Legal	Simplex: 76 ppm	Duplex: 38 sheets/minute (76 ppm)
	A3/Ledger	Simplex: 66 ppm	Duplex: 33 sheets/minute (66 ppm)
Duplex Printing		Standard	
Paper Size		Maximum: 340 mm × 550 mm (13 3/8" × 21 5/8") Minimum: 90 mm × 148 mm (3 9/16" × 5 13/16")	
Printable Area		ComColor 7010/7010R/1C+ Maximum: 310 mm × 544 mm (12 3/16" × 21 7/16") ComColor 3010/3010R Maximum: 210 mm × 544 mm (8 1/4" × 21 7/16")	
Guaranteed Print Area* ³		Standard: Margin width of 5 mm (3/16") Maximum: Margin width of 3 mm (1/8")	
Paper Weight		46 g/m ² (12-lb bond) to 210 g/m ² (56-lb bond) (plain paper)	
Paper Feed Method/Paper Tray Capacity* ⁴		1,000 sheets (Height up to 110 mm (4 5/16"))	
Continuous Printing Capacity		9,999 sheets	
Output Tray Capacity* ⁴	Standard	500 sheets (Height up to 60 mm (2 3/8"))	
	Option	1,000 sheets (when using the optional auto-control stacking tray or wide stacking tray)	
Page Description Language		Original PDL	
Supported Protocols		TCP/IP, HTTP, HTTPs (SSL), DHCP, ftp, lpr, IPP, SNMP, Port 9100 (RAW port)	

Supported Operating Systems	Microsoft® Windows® 2000* ⁸	
	Microsoft® Windows® XP (32-bit)	
	Microsoft® Windows Server® 2003 (32-bit/64-bit)	
	Microsoft® Windows Server® 2003 R2 (32-bit/64-bit)	
	Microsoft® Windows® 2000 Server* ⁸	
	Microsoft® Windows Vista® (32-bit/64-bit)	
	Microsoft® Windows Server® 2008 (32-bit/64-bit)	
	Microsoft® Windows Server® 2008 R2 (64-bit)	
	Microsoft® Windows® 7 (32-bit/64-bit)	
	Microsoft® Windows Server® 2012 (64-bit)	
	Microsoft® Windows Server® 2012 R2 (64-bit)	
	Microsoft® Windows® 8 (32-bit/64-bit)	
	Microsoft® Windows® 8.1 (32-bit/64-bit)	
Installed Fonts		None
Emulation		None
Network Interface		Ethernet 1000BASE-T, 100BASE-TX, 10BASE-T (2ch)
CPU		Intel® Celeron®-M440 (1.86 GHz)
Memory Capacity		512 MB
Hard Disk* ⁶	Capacity	160 GB
	Available Space	140 GB
Operating System		Linux
Power Source		ComColor 7010/7010R/3010/3010R: AC 100-240 V, 10-5 A, 50-60 Hz ComColor 1C+: AC 100-240 V, 6-3 A, 50-60 Hz
Power Consumption	ComColor 7010/7010R/3010/3010R: Max. 1,000 W ComColor 1C+: Max. 600 W	
	Ready* ⁵ : 250 W	
	Sleep: Max. 45 W	
	Stand-by: Max. 1 W	
Operating Noise		Max. 68 dB (when printing)
Operating Environment		Temperature: 15°C to 30°C (59°F to 86°F) Humidity: 40% to 70% RH (non-condensing)
Dimensions (W × D × H)		In use: 1,220 mm × 705 mm × 1,030 mm (48 1/32" × 27 3/4" × 40 9/16")
Weight		ComColor 7010/7010R/3010/3010R: 146 kg (322 lb) ComColor 1C+: 142 kg (313 lb)
Safety		IEC60950-1 compliant, Indoor, pollution degree 2*, At altitudes of 2000m or lower * The pollution degree of the usage environment due to dirt and dust in the air. Degree "2" corresponds to a general indoor environment.
Required Space (W × D × H)		With front cover extended: 1,220 mm × 1,240 mm × 1,030 mm (48 1/32" × 48 13/16" × 40 9/16") With face down tray and standard tray stored: 1,155 mm × 705 mm × 995 mm (45 15/32" × 27 3/4" × 39 3/16")

*1 Within 10 minutes after the last print job

*2 When using plain paper and recycled paper (85 g/m² (23-lb bond)), and density setting 3 (Standard)
Chart used: Print measurement pattern [Color measurement sample 2 (JEITA standard pattern J6)]

*3 The margin when printing envelopes is 10 mm (3/8").
The guaranteed area when printing images is the area enclosed within 5 mm (3/16") of the edges of the paper.

*4 When using plain paper and recycled paper (85 g/m² (23-lb bond))

*5 When not printing

*6 One gigabyte (GB) is calculated as 1 billion bytes.

*7 The continuous print speed varies depending on the type of optional output equipment connected.
Face down offset tray: Max. 110 sheets/minute (A4-R Simplex)

*8 This Operating System is not supported for ComColor 1C+.

■ Scanner HS4000 (Optional)

Copy/Scan Functions

Type		Flat Bed Scanner with Automatic Document Feeder (ADF)
Scanning modes		Color, Monochrome, Auto
Scanning resolution		600 dpi, 400 dpi, 300 dpi, or 200 dpi
Maximum scanning area		303 mm × 432 mm (11 15/16" × 17") (when using platen glass) 295 mm × 430 mm (11 5/8" × 16 15/16") (when using ADF)
Copy functions	Writing resolution	Standard: 300 dpi × 300 dpi Fine: 300 dpi × 600 dpi
	Copy paper size	Maximum: 303 mm × 432 mm (11 15/16" × 17") (equivalent to A3)
	Initial copy time	Monochrome/Color: 11.5 sec or less (when copying A4-R/Letter-R orientation using Color Priority Mode)
	Scanning speed	Simplex copying (A4-R/Letter-R, using ADF): 40 ppm or higher Duplex copying (A4-R/Letter-R, using ADF): 9 sheets/minute (18 ppm) or higher
	Reproduction size	50% to 200% (Copy mode) 50% to 200% (Scanner mode, resolution: 200/300 dpi), only 100% (Scanner mode, resolution: 400/600 dpi)
ADF	Type	Original source displacement (capable of duplex scanning by switch-back)
	Original source size	Maximum: 297 mm × 432 mm (11 11/16" × 17") (equivalent to A3) Minimum: 100 mm × 148 mm (3 15/16" × 5 13/16")
	Paper quality	52 g/m ² (14-lb bond) to 128 g/m ² (34-lb bond)
	Original source capacity Smaller than B4 size	80 g/m ² (21-lb bond) or less: Max. 100 sheets More than 80 g/m ² (21-lb bond): Height up to 15 mm (5/8")
	Original source capacity B4 size or larger	80 g/m ² (21-lb bond) or less: Max. 60 sheets More than 80 g/m ² (21-lb bond): Height up to 9 mm (3/8")
	Original source exchange speed	Simplex printing: 40 ppm or higher (A4-R/Letter-R) Duplex printing: 9 sheets/minute (18 ppm) or higher (A4-R/Letter-R)
Scan functions	Scanning gray levels	10-bit input and 8-bit output for each RGB color
	Original source scanning speed	Monochrome/Color: 40 ppm * RISO KAGAKU standard original (A4-R/Letter-R), 200 dpi, when stored to main unit hard drive
	Network Interface*	Ethernet 1000BASE-T/100BASE-TX/10BASE-T
	Data-saving method*	Save to main unit hard drive, server, or USB flash drive, or send by e-mail
	Data-saving format*	Monochrome: TIFF, PDF Grayscale/Full Color: TIFF, JPEG, PDF
Power source		AC 100-127/200-240 V, 50/60 Hz
Power consumption		Max. 120 W
Dimensions		650 mm × 560 mm × 255 mm (25 19/32" × 22 1/16" × 10 1/32")
Weight		Approx. 28 kg (62 lb)
Dimensions (when connected to main unit) (W × D × H)		In use: 1,225 mm × 810 mm × 1,220 mm (48 7/32" × 31 7/8" × 48 1/32") With cover and tray extended: 1,225 mm × 1,345 mm × 1,615 mm (48 7/32" × 52 31/32" × 63 19/32")

* Via the internal host controller

■ Multifunction Finisher (Optional)

Tray Type	Top Tray	Collating, stacking
	Stacking Tray	Collating, stacking (offset)
	Booklet Tray	Booklet, Paper folding
Paper Size	Top Tray ^{*1}	Maximum: 330 mm × 488 mm (13" × 19 3/16") Minimum: 100 mm × 148 mm (3 15/16" × 5 13/16")
	Stacking Tray ^{*1}	Maximum: 330 mm × 488 mm (13" × 19 3/16") Minimum: 182 mm × 182 mm (7 3/16" × 7 3/16")
	Stapling	Maximum: 297 mm × 432 mm (11 11/16" × 17") (equivalent to A3) Minimum: 203 mm × 182 mm (8" × 7 3/16")
	Booklet Tray ^{*1}	Maximum: 330 mm × 457 mm (13" × 18") Minimum: 210 mm × 280 mm (8 1/4" × 11")
Paper Weight	Top Tray	52 g/m ² (14-lb bond) to 210 g/m ² (56-lb bond)
	Stacking Tray	52 g/m ² (14-lb bond) to 210 g/m ² (56-lb bond)
	Booklet Tray	60 g/m ² (16-lb bond) to 90 g/m ² (24-lb bond) (cover: 210 g/m ² (56-lb bond))
Tray Capacity	Top Tray	500 sheets
	Stacking Tray ^{*3}	2,000 sheets (200 copies)
	Booklet Tray	20 copies
Stapling	Maximum Number of Staples ^{*2*4}	100 sheets
	Staple Paper Size	Maximum: 297 mm × 432 mm (11 11/16" × 17") (equivalent to A3) Minimum: 203 mm × 182 mm (8" × 7 3/16") (equivalent to B5-R)
	Staple Position	1 at front side (angle stapling), 1 at rear side (angle stapling ^{*5} , parallel stapling), 2 at center (parallel stapling)
Punching	Number of Punches	2 holes, 3 holes 2 holes, 4 holes
	Applicable Sizes	2 holes: A3, B4, A4-R, A4, B5-R, Ledger, Legal, Letter, Letter-R 3 holes: A3, B4, A4-R, B5-R, Ledger, Letter-R 4 holes: A3, A4-R, Ledger, Letter-R
	Paper Weight	52 g/m ² (14-lb bond) to 200 g/m ² (53-lb bond)
Creating a Booklet (Center margin/2-fold)	Maximum Number of Sheets ^{*2*6}	Center margin: 15 sheets (60 pages) 2-fold: 5 sheets (20 pages)
Operating Environment		Temperature: 15°C to 35°C (59°F to 95°F) Humidity: 40% to 70% RH (non-condensing)
Dimensions (W × D × H)		1,120 mm × 765 mm × 1,130 mm (44 3/32" × 30 1/8" × 44 1/2")
Weight		131 kg (289 lbs)
Power Source		AC 100-120/200-240 V, 50/60 Hz, 2.0/1.0 A or more
Power Consumption		Max. 175 W
Operating Noise (when using finisher)		Max. 68 dB
Dimensions (when Connected to main unit) (W × D × H)		In use: 2,315 mm × 765 mm × 1,130 mm (91 5/32" × 30 1/8" × 44 1/2")
		With cover, and tray extended: 2,315 mm × 1,280 mm × 1,130 mm (91 5/32" × 50 13/32" × 44 1/2")

*1 When color printing on paper that is longer than 432 mm (17"), the image printed beyond 432 mm (17") may be distorted.

*2 When using plain paper and recycled paper (85 g/m² (23-lb bond))

*3 When using plain paper and recycled paper (85 g/m² (23-lb bond)) with A4 or B5-R orientation
When using paper sizes other than A4 or B5-R, the capacity is 1,500 sheets (100 copies)

*4 65 sheets for a paper size exceeding A4/Letter

*5 Rear-side angle stapling is only available for A4-R and A3.

*6 Includes an added cover.

■ IC Card Authentication Kit (Optional)

Applicable Card	ISO 14443 TypeA/TypeC (FeliCa [®] /Mifare [®])
Radio Law Category	Guided read-write communication equipment
Power Source	Power received from USB port
Operating Environment	Temperature: 15°C to 30°C (59°F to 86°F) Humidity: 40% to 70% RH (non-condensing)
Dimensions (W × D × H)	93 mm × 65 mm × 19 mm (3 21/32" × 2 9/16" × 25/32") (excluding protruding parts)
Weight	90 g (3 oz)

Notice for European Union Member States

RISO, the environment and the Waste Electrical and Electronic Equipment Directive "WEEE Directive"

What is the WEEE Directive?

The purpose of the WEEE Directive is to reduce waste and ensure Electrical and Electronic Equipment is recycled at the end of its useful life.



What does the crossed out wheeled bin symbol mean?

The crossed out wheeled bin symbol indicates this product must be disposed of separately to normal waste. Please contact your RISO service agent for information about disposal.

What does the solid bar symbol mean?

The solid bar under the crossed out wheeled bin indicates this product was put on the market after the 13th August 2005.

Who should I contact if I want more information about the WEEE Directive?

You should contact your local RISO service agent for more information.

Trademark Credits

Microsoft and Windows are registered trademarks of Microsoft Corporation in the U.S. and/or other countries.

ColorSet is a trademark of Monotype Imaging Inc. registered in the U.S. Patent & Trademark Office and may be registered in certain jurisdictions.

Intel and Celeron are trademarks of Intel Corporation in the United States and other countries.

FeliCa is a registered trademark of Sony Corporation.

Mifare is a registered trademark of Royal Philips Electronics.

ComColor and FORCEJET are trademarks of RISO KAGAKU CORPORATION.

RISO is a registered trademark of RISO KAGAKU CORPORATION in Japan and other countries.

All other product names and company names written in this guide are trademarks or registered trademarks of their respective companies.

RISO